


REVISIONS				
REV.	REF ECO. NO.	DESCRIPTION	DATE	APPROVED
A	N/A	REMOVE PROPRIETARY STATEMENT	3/4/09	N.R.S.

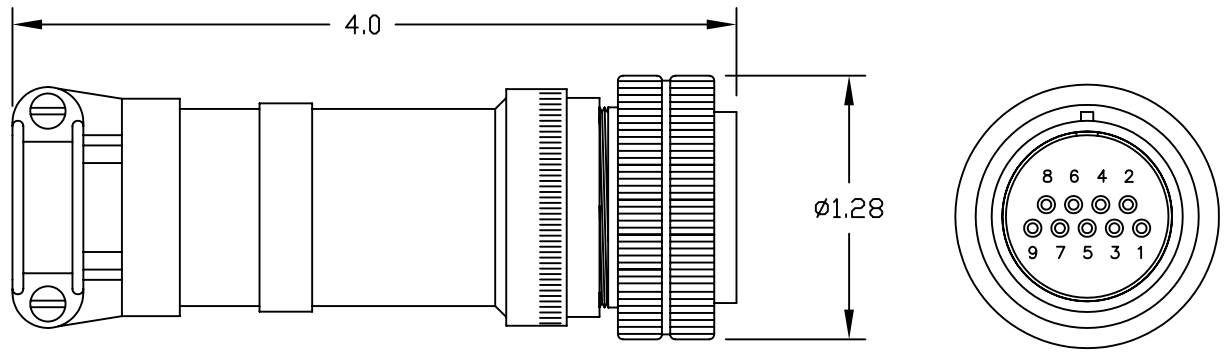

- CONNECTOR MEETS THE ELECTRICAL REQUIREMENTS OF ANSI/TIA/EIA-568-B.1 FOR CATEGORY 5E CABLING SYSTEMS AND ANSI/TIA/EIA-568-B-2-1, TRANSMISSION PERFORMANCE FOR 4 PAIR 100 OHM CATEGORY 6 CABLING.
- CONTACT STYLE IS AVAILABLE WITH PINS OR SOCKETS, GOLD PLATED COPPER ALLOY.
- MECHANICAL CONFIGURATION SIMILAR TO MILITARY SPECIFICATION D38999/26, SHELL SIZE 15, SIZE CODE D.
- CONNECTOR, PLUG IS SUPPLIED PREWIRED TO CUSTOMERS CABLE TYPE AND LENGTH REQUIREMENTS.
- CONNECTOR FINISH OPTIONS: CORROSION RESISTANT STEEL
ELECTROLESS NICKEL COATED ALUMINUM
OLIVE-DRAB CADMIUM COATED ALUMINUM
- OPERATING TEMPERATURE RANGE: -65°C TO 175°C OR AS LIMITED BY CABLE TYPE.
- MATES AMETEK SCP RECEPTACLE CR5740.

AMETEK[®] SCP, Inc.
52 AIRPORT RD WESTERLY, R.I. 02891

CONNECTOR, PLUG, ETHERNET

SIZE	CAGE NO.	DWG. NO.	REV.
A	ODNZ3	CP5739	A
SCALE: 1/1	SHEET 1 OF 1		